


VERSION	CHANGE CONTENT	DATE
V01	FIRST ISSUE	2015.07.10

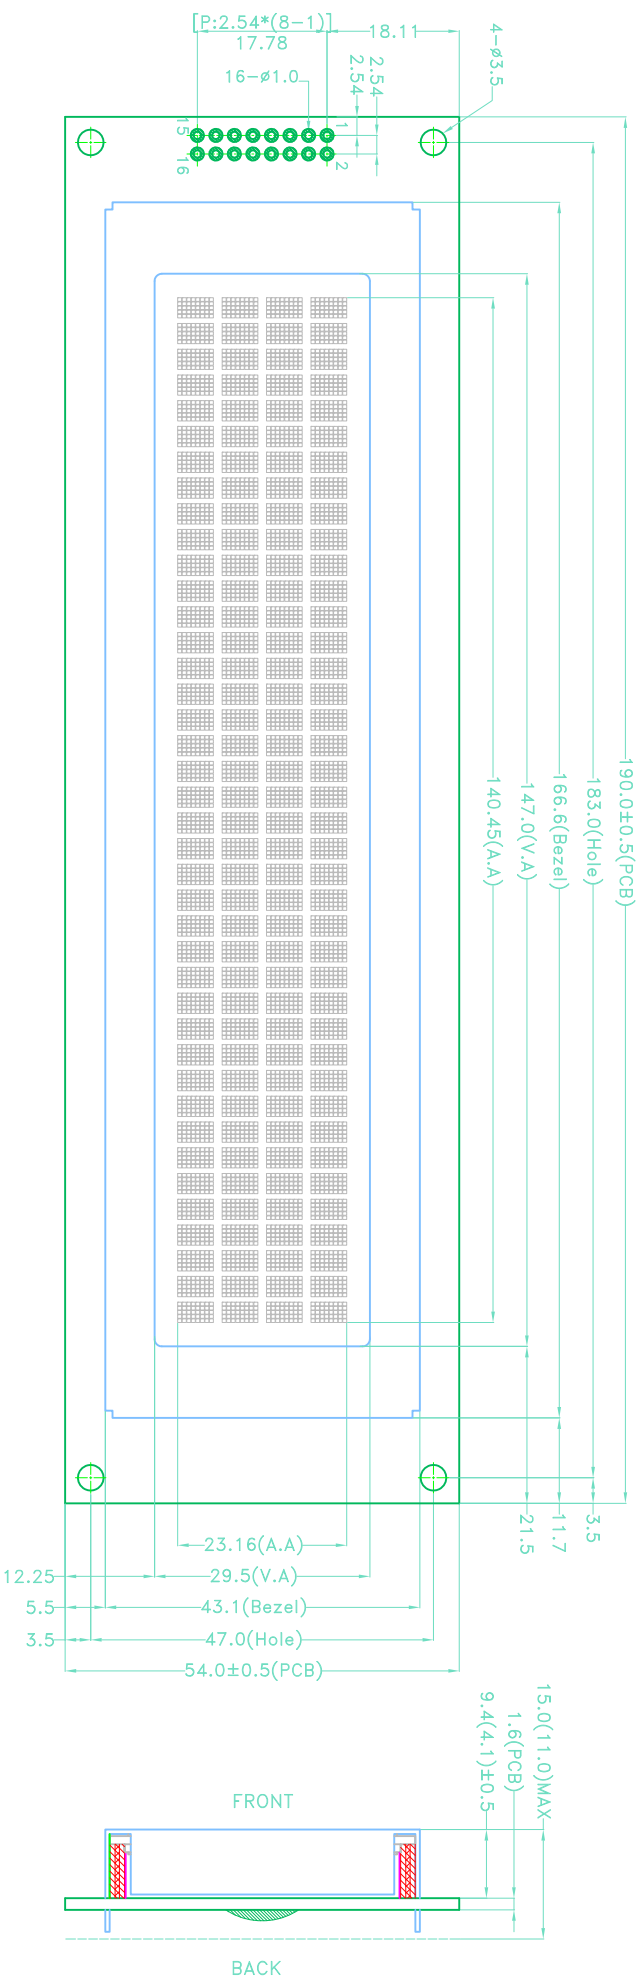

SPECIFICATIONS

1. DISPLAY TYPE:STN V/G/STN BLUE /STN Positive/Negative
2. DISPLAY RESOLUTION: 40*04 CHARACTER
3. LCD DRIVING VOLTAGE:4.7V
4. LOGIC VOLTAGE:5.0V
5. VIEWING DIRECTION:12 O'CLOCK
6. OPERATING TEMP:0°C -- +50°C
7. STORAGE TEMP:-10°C -- +60°C
8. LCD CONTROLLER /DRIVE:SPLC780(Or Compatible)
9. DRIVE MODE:1 /16 DUTY,1 /5 BIAS
10. BACKLIGHT:LED:SIDE LED OR BUTTOM LED BACKLIGHT
11. REMARK:

PCB PIN ASSIGNMENT:

1	DB7	10	R/W
2	DB6	11	RS
3	DB5	12	V0
4	DB4	13	VSS
5	DB3	14	VDD
6	DB2	15	E2
7	DB1	16	VEE
8	DB0	17	A
9	E	18	K

DESCRIPTION:		ThingWell Electronics	
SCALE: 1:1			
SHEET: 1 OF 1			
UNIT: mm	PROJECTION	LCM NUMBER	WA4004A
APP:		DRAWING VERSION	V01
DATE:		CHK:	
		DWN:	
		DATE:	

MECHANICAL TOLERANCE:X:±0.3,X:XX±0.2